


www.citadelfloors.com (866) 765-4310



QR Barcode with your phone and learn more about **Citadel**

Scan this

Metallic

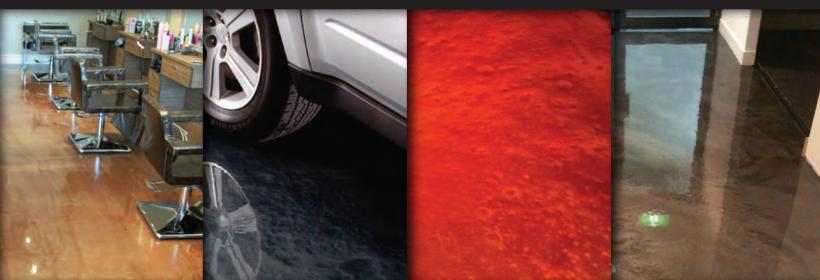

Metallic System Characteristics:

- The FASTEST, EASIEST and TOUGHEST metallic system on the market. (*Return to service in 24 hrs.*)
- Has the appearance of "marble-like" and "chameleon" color changing textures.
- Easy to maintain, No waxing or upkeep needed!
- Finishes multiple surfaces (Concrete, Wood, Tile)










Project Spotlight: Boat Dealership

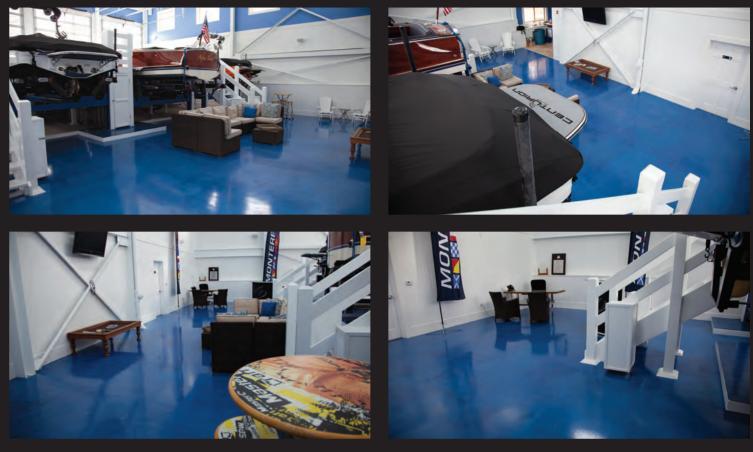






Pearlescent Metallic[™] powder tints produce marbleized floor coatings that contain pearlescent and iridescent accents with gleaming finishes. These lustrous floor coatings are the newest solution for commercial applications, retail environments and for many residential customers looking to set their home apart from others.



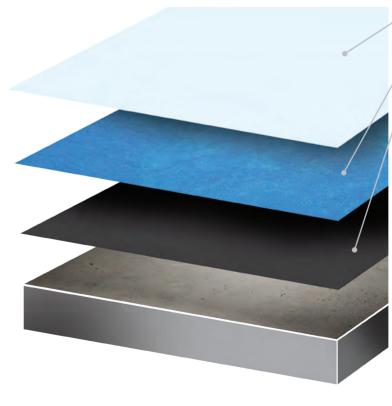

PolyCuramine[™]

Clear Base and Topcoat

PolyCuramine[™] is an odor free, interior clear base, which serves as the foundation of a multitude of the Citadel finishing systems. It provides incredible abrasion resistance and extreme chemical resistance. This product combines key attributes from multiple chemistries into one indestructible, self-leveling, flexible, fast curing, high gloss coating system.



PolyCuramine[™] is Self-Leveling and Buildable, and can be used to help "float out" and level damaged floors that show the effects of spalling, deterioration, shaling, etc. With rapid cure times of 6-12 hours, this coating can essentially "re-build" a floor quickly with all the benefits of Polyurea including flexibility, excellent adhesion and abrasion resistance. The PolyCuramine does not require sanding prior to re-coating which can help keep installations on schedule without added labor. This boat dealership wanted create a custom look for their showroom with a quick return to service. The solution was a custom Metallic PolyCuramine[™] floor.



PolyCuramine[™] with Metallic Tint

Fast Cure Primer

COMPARE CITADEL POLYCURAMINE TO EPOXY		
	PolyCuramine	Ероху
Durability	20X Stronger Than	0
Flexibility	98%	2%
Product Type	PolyCuramine	Ероху
Vehicle Traffic	24 Hours	7 Days
Installation	One Day	2-3 Days
Warranty	Limited Lifetime	0
% of Solids	96%	33%