

New Products

SLE-100

CFFS SLE-100™ is a two component, **100% solids**, cyclo-aliphatic hybrid coating system that has exceptional adhesion properties to concrete substrates. Due to its unique chemistry, this coating exhibits great flexibility, working times and self-leveling properties while offering great chemical resistance as well. Low odor makes it a great choice for interior applications.



SLE-100 Features:

- ▶ **100% SOLIDS FORMULATION**
- ▶ VOC FREE.
- ▶ 60 minute pot life.
- ▶ Both a primer and basecoat in 1 easy coat.
- ▶ Virtually no odors and can be applied indoors with minimal disturbance to surrounding activities.
- ▶ Great self-leveling properties with a built in shine.

U-80

CFFS Aspartic U-80™ is a new two-component, 80% solids, aliphatic polyaspartic coating that was developed for UV stable floor topcoats, chemical resistance and corrosion control. A 1 hour potlife provides reliable and repeatable performance in a wide range of applications. Aspartic U-80™ exhibits excellent UV stability, making it an excellent choice for both interior and exterior applications.



U-80 Features:


- ▶ **GLOSSY, SMOOTH FINISH**
- ▶ Can be applied at temperatures ranging from 40 to 120°F and in high humidity.
- ▶ 1-hour potlife for better workability while maintaining a fast cure rate.
- ▶ UV Stable with Excellent chemical and abrasion resistance.
- ▶ Use on both horizontal and vertical applications.

SLE-100



SLE-100 Clear Top Coat

SLE-100 Tinted Primer/Base Coat

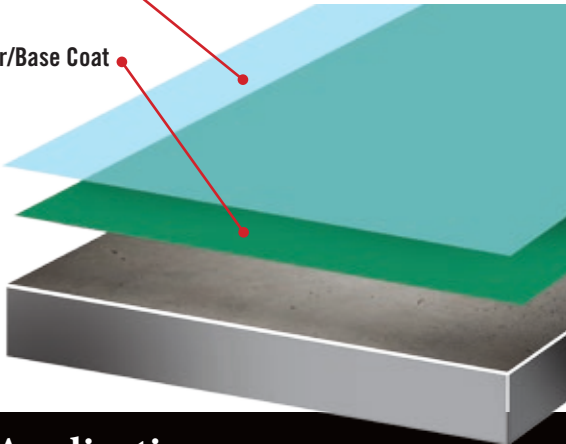

Primary Applications

- *Direct to concrete, single coat solid color systems*
- *Primer/Basecoat for Solid Color and Broadcast systems*
- *Self-Leveling build coat for heavily damaged floors*

Typical Processing Properties:

Two Component Tack Free - 8-10 hours
 72°F - 54% Relativity Humidity Hard dry - 12-16 hours
 Recoat Maximum – N/A
 Coverage: 1,600 square feet, per gallon, per mil.

Recommended Coverage

Primer/Basecoat/Topcoat 100-200 sf/gal @16 or 8 mils DFT


U-80



U-80 Top Coat

Decorative Chip or Other System

Polyurea 350 with Color Tint

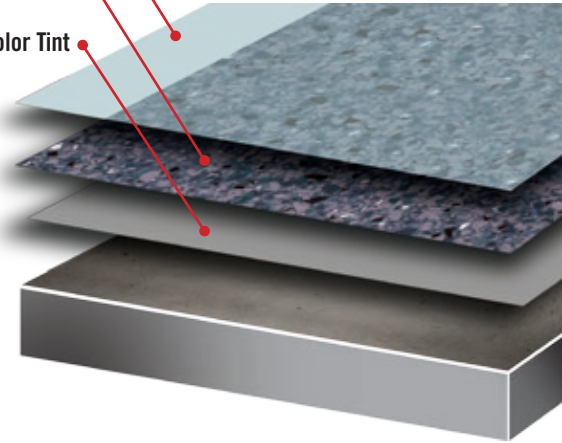

Primary Applications

- *UV-stable top coat*
- *Maintenance facilities*
- *Exterior patios and walkways*
- *Vertical Wall applications*
- *Commercial Floor applications*
- *Industrial shop floors*
- *Secondary containment*
- *Residential garage floors and basements*

Typical Processing Properties:

72°F-54% Relativity Humidity Hard dry-5 hours
 Through Dry-9 hours
 Coverage: 1,600 square feet, per gallon, per mil.

Recommended Coverage

Over Solid Color 250-350 sf/gal @4.3 mils DFT
 Over Quartz 80-120 sf/gal @12.8 mils DFT
 Over Chip 150-225 sf/gal @8.2 mils DFT



Scan this
 QR Barcode
 with your phone
 and learn more
 about Citadel



Contact us for more information, (866) 765-4310

www.citadelfloors.com