



www.citadelfloors.com

(866) 765-4310



Scan this
QR Barcode
with your phone
and learn more
about Citadel



SLE-100

Citadel's 100% Solids Epoxy



SLE-100 Features:

- ▶ 100% SOLIDS FORMULATION
- ▶ VOC FREE.
- ▶ 60 minute pot life.
- ▶ Both a primer and basecoat in 1 easy coat.
- ▶ Virtually no odors and can be applied indoors with minimal disturbance to surrounding activities.
- ▶ Great self-leveling properties with a built in shine.



Project Spotlight: Power Plant

This power plant needed 50,000 square feet of solid color coating. After the project was completed the installer gave us the feedback, **"THIS IS THE BEST EPOXY I HAVE EVER USED!"**




SLE-100™

SLE-100 is a two component, 100% solids, cyclo-aliphatic hybrid coating system that has exceptional adhesion properties to concrete substrates. Due to its unique chemistry, this coating exhibits great flexibility, working times and self-leveling properties while offering great chemical resistance as well. Low odor makes it a great choice for interior applications. Sold in Clear or pre-tinted.

COLORS



Clear

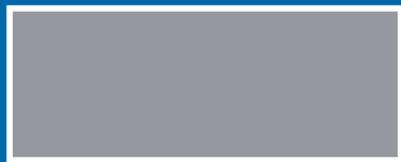

Light Gray



Dunes Tan



Navy Gray



Silver Gray



Super Light Gray



Typical Processing Properties:


Two Component Tack Free - 8-10 hours
72°F - 54% Relative Humidity Hard dry - 12-16 hours
Recoat Maximum - N/A
Coverage: 1,600 square feet, per gallon, per mil.

Recommended Coverage
Primer/Basecoat/Topcoat 100-200 sf/gal @16 or 8 mils DFT



SLE-100 Clear Top Coat

SLE-100 Tinted Primer/Base Coat

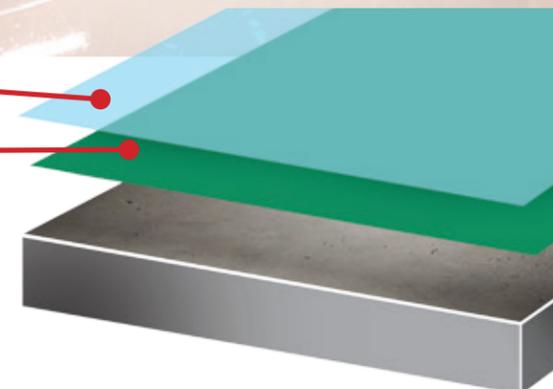

Contact us for more information, (866) 765-4310

www.citadelfloors.com